


MODEL 209.3

- 1 Lens
2 Release

N70 Overhead control panel control unit

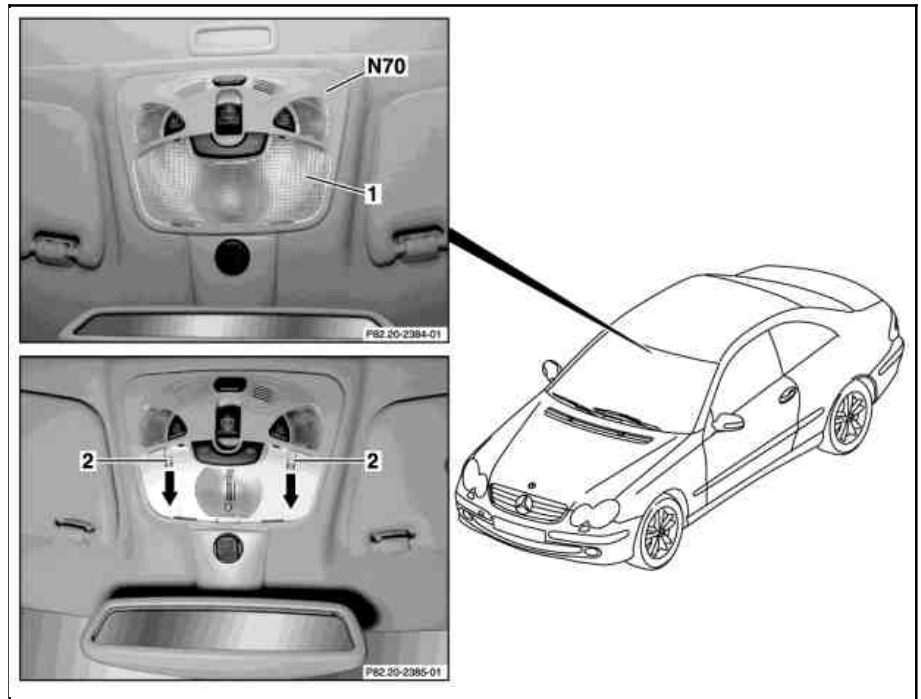


P82.20-2386-06

Modification notes

17.10.05	Disconnect ground line of battery, removed	Step 2	
----------	--	--------	--

	Remove/install		
1.1	Transfer basic data from overhead control panel control unit (N70) to STAR DIAGNOSIS	When installing new overhead control panel control unit (N70).	
AD	Connect STAR DIAGNOSIS and read out fault memory	i Installation: Transfer buffered basic data to new overhead control panel control unit (N70), and for code (414) Tilting/sliding roof, normalize the anti-pinch protection.	AD00.00-P-2000-04A
		STAR DIAGNOSIS diagnosis system	*WH58.30-Z-1048-13A
2	Remove transmitter key from electronic ignition switch control unit		
3	Pry off lens (1) from overhead control panel control unit (N70)	(!) Risk of cracks and fracture to headliner and overhead control panel control unit (N70). (S) Mounting wedge	*110589035900
4	Press overhead control panel control unit (N70) release (2)	i Press in direction of arrow.	
5	Remove the overhead control panel control unit (N70)	(!) Installation: Excess pressure and tensile stress on the roof switch will damage the overhead control panel control unit (N70)	
6	Disconnect connectors from overhead control panel control unit (N70)		
7	Install in the reverse order		
8.1	Normalize tilting/sliding roof	i For vehicles with code (414) Tilting/sliding roof	
AD	Read fault memory, erase if necessary Connect STAR DIAGNOSIS and read out fault memory	STAR DIAGNOSIS diagnosis system	AD00.00-P-2000-04A *WH58.30-Z-1048-13A

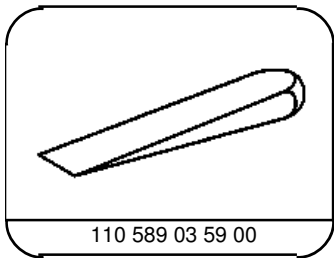

110 589 03 59 00

Mounting wedge

Commercially available tools

Number	Designation
WH58.30-Z-1048-13A	STAR DIAGNOSIS diagnosis system, Compact Passenger Car 6511 1801 00