



The service reminder indicator (SRI) is lit for two minutes each time the engine is started until it is reset after the next service. Reset the service reminder indicator (SRI) directly in the Yazaki instrument as follows:

Resetting the service reminder indicator (SRI):

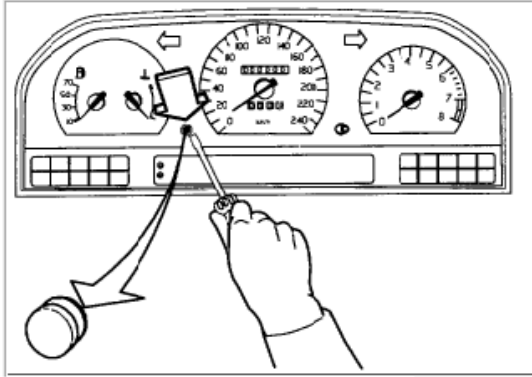

- Remove rubber plug without scratching the glass.
- Press in button as far as it will go.
- Install plug.

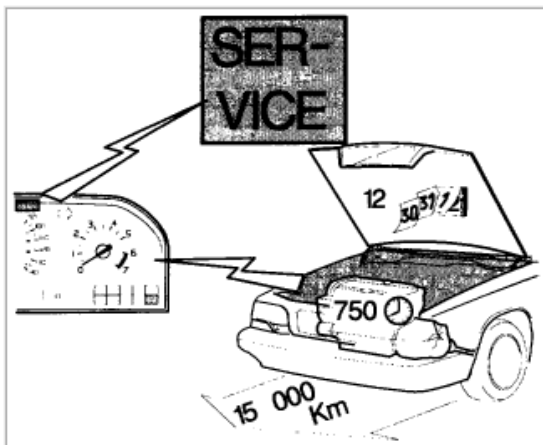

The service reminder indicator (SRI) is lit when the following factory set service interval is reached:

Yazaki 15,000 km/10,000 miles