


1999 Chrysler Truck Town & Country LWB FWD V6-3.8L VIN L

Vehicle Level → Heating and Air Conditioning → Air Door → Air Door Actuator / Motor → Service and Repair
 → Blend Door Actuator Replacement ←

Blend Door Actuator Replacement

[Notes](#)

REMOVAL

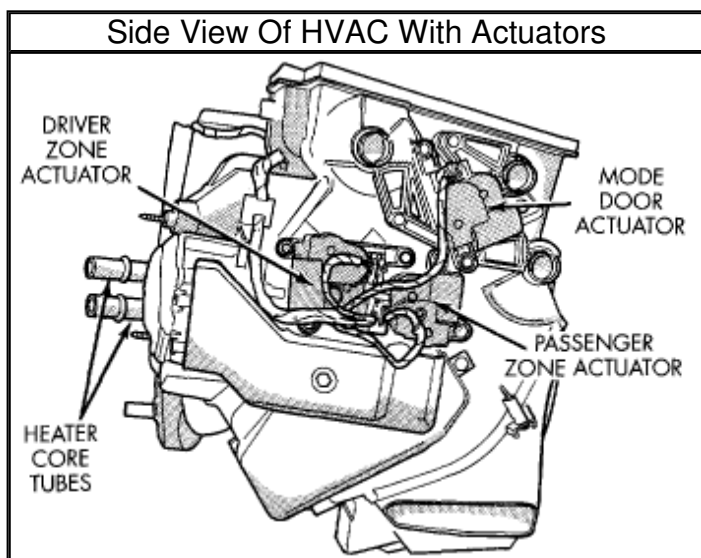



Zoom

Sized for Print

The air conditioning system can be equipped with either a standard, single blend-air door actuator, or it can be equipped with dual actuators. The dual system has separate blend-air controls. This allows for separate control of the driver's side air, and the passenger side air.

1. Remove the lower left side steering column cover. Refer to Instrument Panel and Systems.

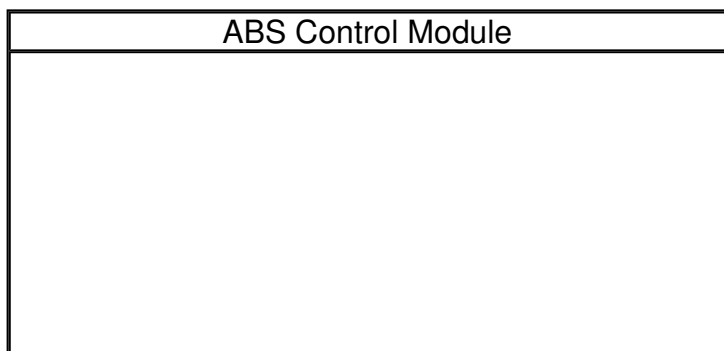


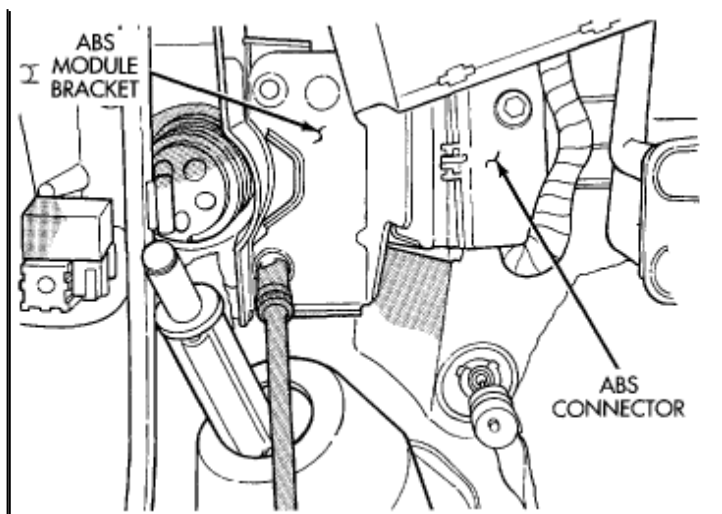

Zoom

Sized for Print

2. Remove ABS control module.
3. Remove blend-air actuator connector.

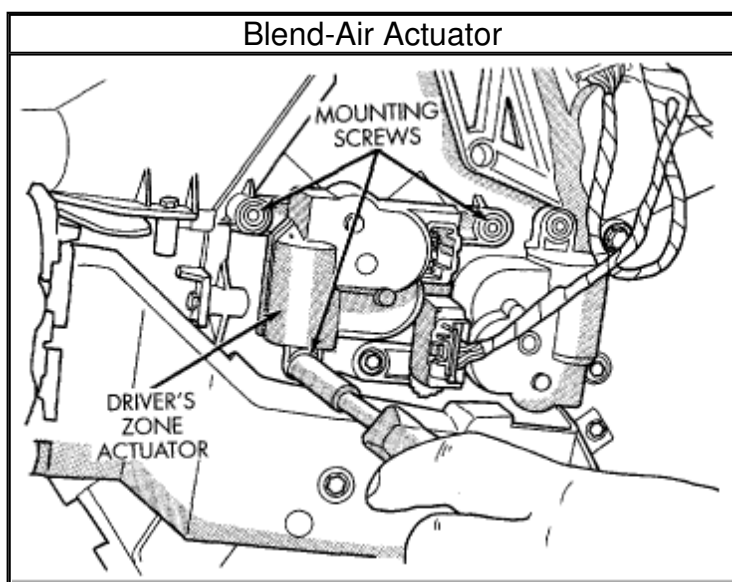

Zoom

Sized for Print

4. Remove blend-air actuator.

INSTALLATION

1. For installation, reverse the above procedures.
2. Perform the HVAC Control Calibration Diagnostic and Cooldown test. Repeating the test is necessary to clear the fault codes.

© 2010 ALLDATA LLC. All rights reserved.
[Terms of Use](#)