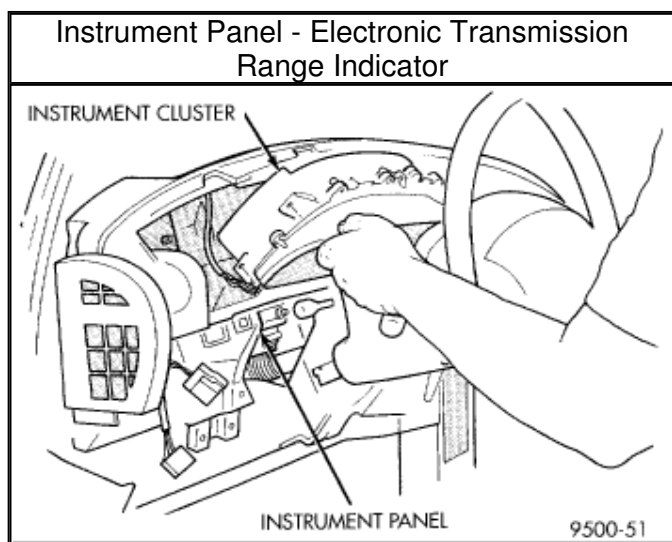


[Select Vehicle](#) | [New TSBs](#) | [Technician's Reference](#)

Component Search:

OK

[Conversion Calculator](#)**1998 Plymouth Truck Grand Voyager V6-3.0L VIN 3**[Vehicle Level](#) → [Instrument Panel, Gauges and Warning Indicators](#) → [Instrument Cluster / Carrier](#) → [Service and Repair](#) → [Instrument Cluster Replacement](#) → [With Electronic Transmission Range Indicator](#) ←**With Electronic Transmission Range Indicator**[Notes](#)**REMOVAL**[Zoom](#)[Sized for Print](#)

1. Remove instrument cluster bezel.
2. Remove screws holding instrument cluster to instrument panel.
3. Rotate top of cluster outward.
4. Remove instrument cluster from instrument panel.
5. Disconnect wire connector from back of instrument cluster.
6. Remove instrument cluster.

INSTALLATION

1. Place instrument cluster in instrument panel, bottom first.
2. Connect wire connector into back of instrument cluster.
3. Position instrument cluster in instrument panel.
4. Install instrument cluster mounting screws to instrument panel.
5. Install instrument cluster bezel.