


**2001 Chrysler Sebring Sedan V6-2.7L VIN U**[Vehicle Level](#) → [Starting and Charging](#) → [Charging System](#) → [Alternator](#) → [Service and Repair](#) ←**Service and Repair**[Notes](#)**REMOVAL**

1. Open Hood.
2. Disconnect the negative [battery cable](#).
3. Raise vehicle and support.
4. Remove the accessory drive belt splash shield.
5. Loosen the accessory drive belt refer to the cooling.
6. Remove the lower mounting bolt.
7. Lower the vehicle.

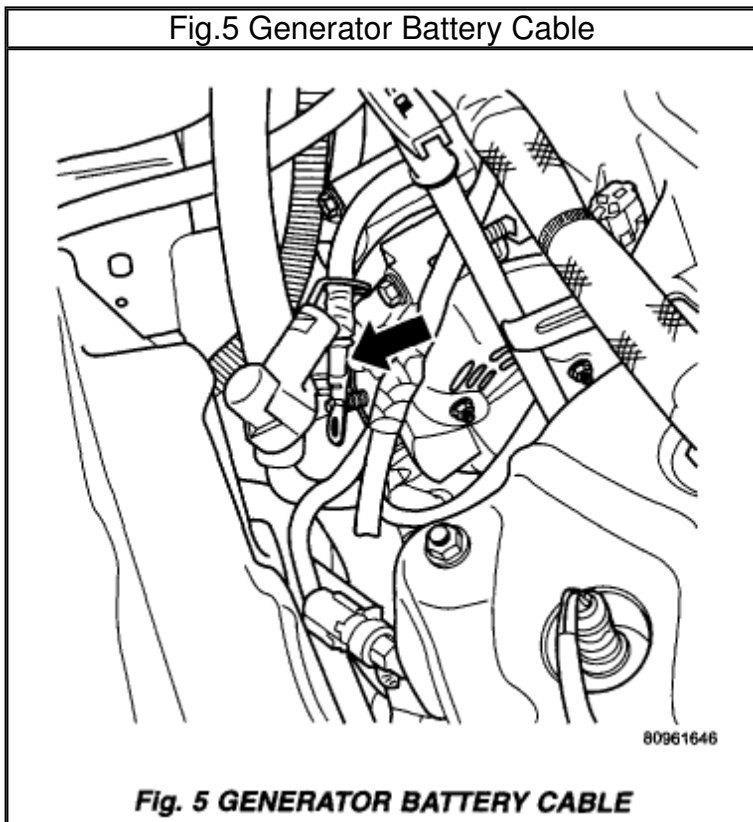


Zoom

Sized for Print

8. Remove the [battery cable](#) and field connection (Fig. 5).
9. Disconnect the electrical connector to the A/C pressure switch and A/C clutch.

10. Remove the engine oil dip stick.
11. Remove the 2 upper mounting bolts.

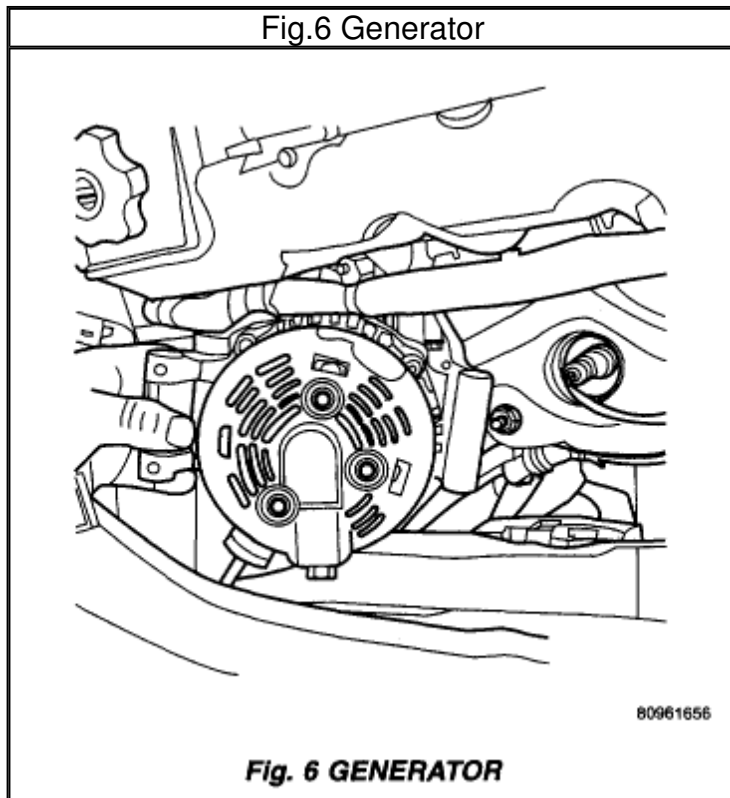

Zoom

Sized for Print

12. Remove the generator (Fig. 6).

## INSTALLATION

1. Install generator (Fig. 6).
2. Install the 2 upper bolts but do not tighten.
3. Install the engine dip stick tube.
4. Connect the A/C pressure switch and A/C clutch electrical connectors.
5. Connect the [battery cable](#) and field connectors (Fig. 5).
6. Raise vehicle and support.
7. Install the lower bolt and tighten.
8. Install the accessory drive belt, refer to the cooling.
9. Install the accessory drive splash shield.
10. Lower the vehicle.
11. Tighten the 2 upper mounting bolts to
12. Connect the negative [battery cable](#).

[Terms of Use](#)