

[Home](#) | [Account](#) | [Contact ALLDATA](#) | [Log Out](#) | [Help](#)

PAUL REDEHOFT

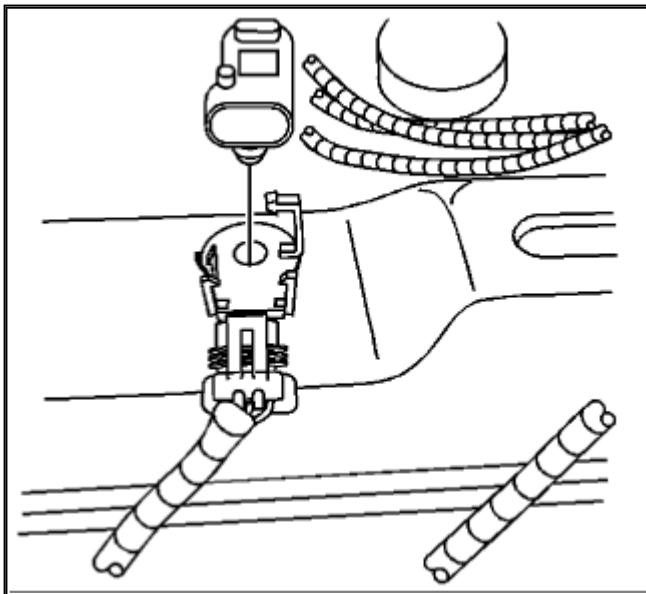
[Select Vehicle](#) | [New TSBs](#) | [Technician's Reference](#) Component Search:

OK

Conversion Calculator

**2003 Cadillac CTS V6-3.2L VIN N**[Vehicle Level](#) → [Powertrain Management](#) → [Computers and Control Systems](#) → [Fuel Tank Pressure Sensor](#) → [Service and Repair](#) ←**Service and Repair**[Notes](#)**REMOVAL PROCEDURE**


1. Remove the fuel tank.

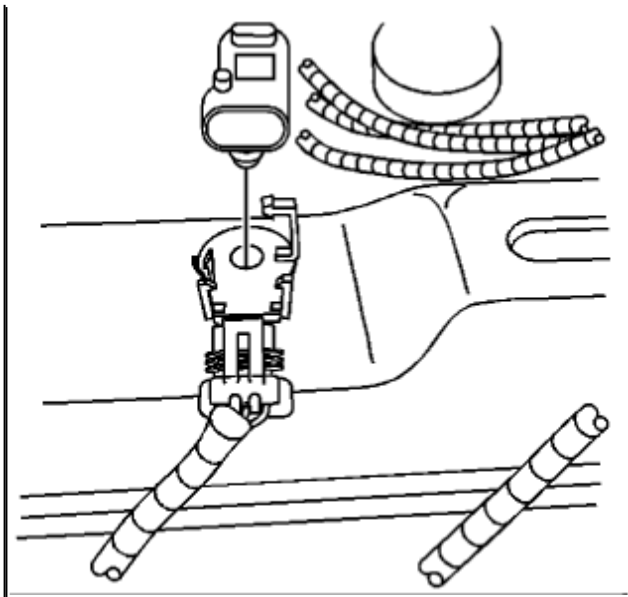


Zoom

Sized for Print

2. Disconnect the electrical connector from the fuel tank pressure sensor.
3. Open the retaining strap.
4. Carefully pry the locking tabs away from the pressure sensor.
5. Pull upward in order to remove the pressure sensor from the fuel tank.

**INSTALLATION PROCEDURE**

[Zoom](#)[Sized for Print](#)

1. Press the fuel tank pressure sensor into the fuel tank, until the locking tabs are fully seated.
2. Close the retaining strap.
3. Connect the electrical connector to the fuel tank pressure sensor.
4. Install the fuel tank.

© 2010 ALLDATA LLC. All rights reserved.

[Terms of Use](#)