



Removal


1. Move the selector lever to position "N".
2. Remove the center console.

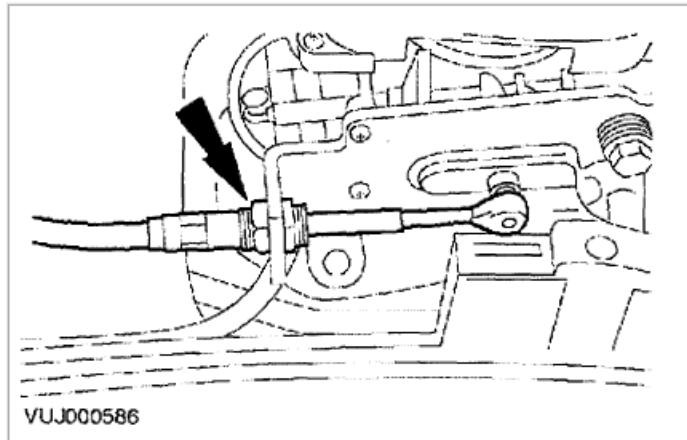


3. Detach the selector cable.

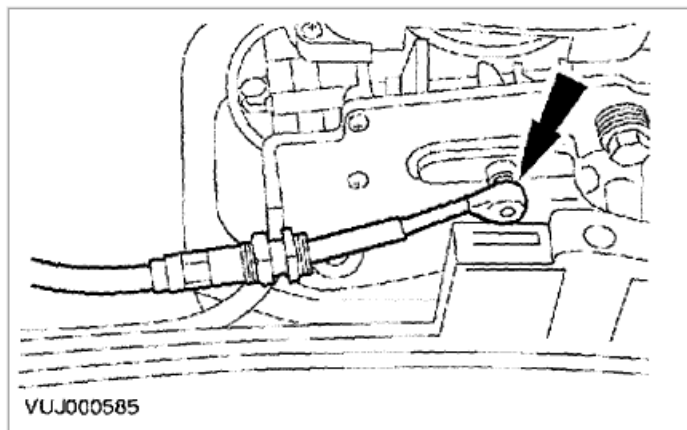


4. Disconnect the selector cable.

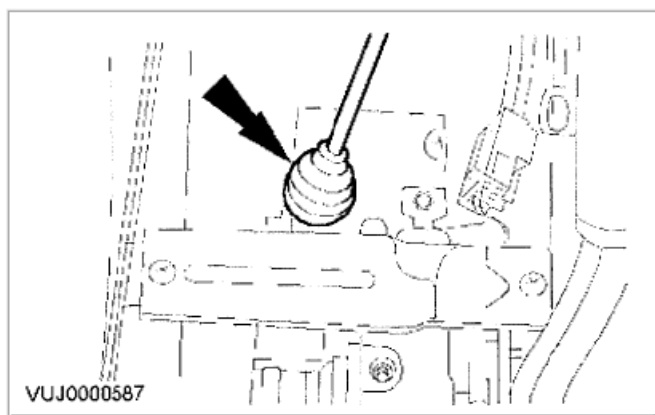

5. Detach the selector cable from the floorpan.
6. Raise and support the vehicle.

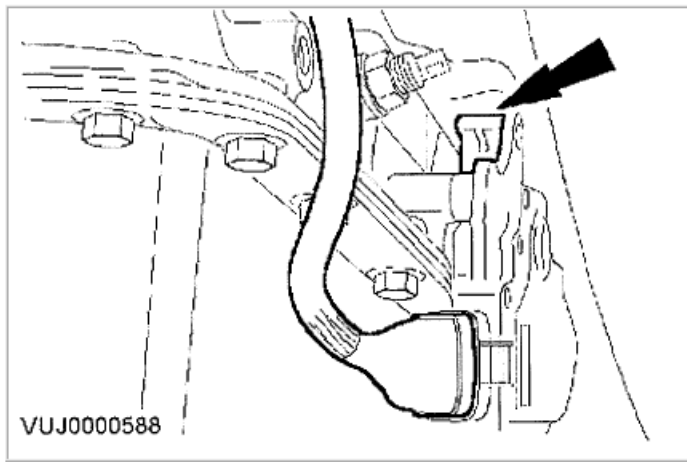

7. Disconnect the selector cable from the rotary switch.

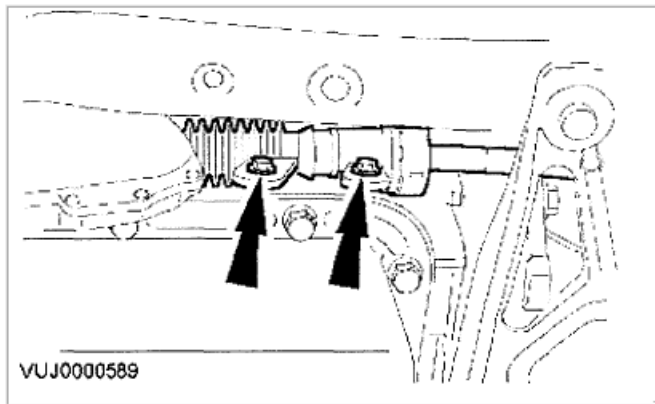

8. Remove the selector cable. Remove the bolts.

Installation

1. **NOTE:** Do not lock the selector cable adjusting nut. To install, reverse the removal procedure. Adjust the cable.