

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2020G Remove/Install Rear Center Console](#) ←

AR68.20-P-2020G Remove/Install Rear Center Console

[Notes](#)

Removing And Installing Rear Center Console

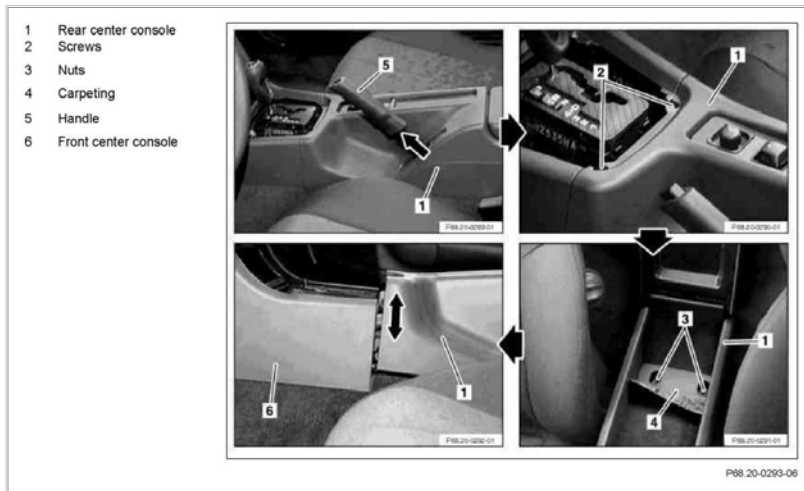

| | | Removal, installation | |
|----|--|---|-----------------|
| 1 | | Remove cover on shift lever | AR68.20-P-2310G |
| 2 | | Pull handle (5) off of parking brake lever | |
| 3 | | Unscrew screws (2) | |
| 4 | | Open cover on stowage compartment | |
| 5 | | Lift carpeting (4) at rear | |
| 6 | | Unscrew nuts (3) and remove | |
| 7 | | Lift center console (2) uniformly while moving out at front with arresting hook at separating point | |
| 8 | | Guide parking handle through opening in retractable cover | |
| 9 | | Disconnect electrical connectors | |
| 10 | | Remove center console (2) | |
| 11 | | Reinstall in opposite order | |

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2010G Remove/Install Front Center Console](#) ←

AR68.20-P-2010G Remove/Install Front Center Console

[Notes](#)

Removing And Installing Front Center Console

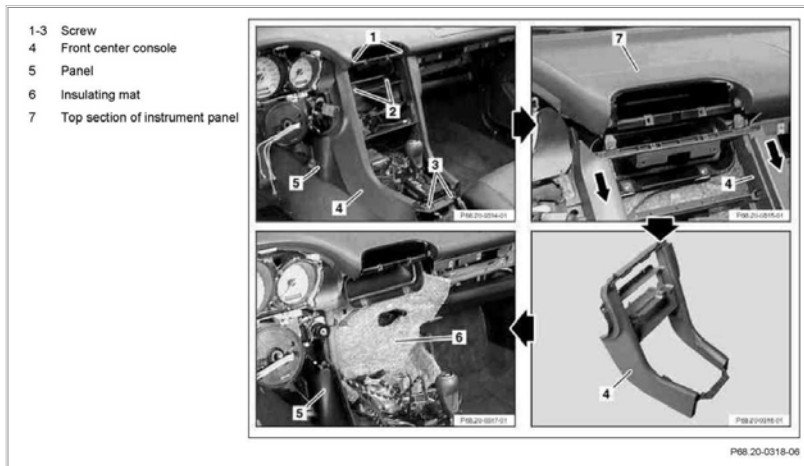

| | Removal, installation | | |
|----|---|---|-----------------|
| 1 | Remove cover below instrument panel (driver's side) | | AR68.10-P-1500G |
| 2 | Remove cover in instrument cluster | | AR68.10-P-1550G |
| 3 | Remove rear center console | | AR68.20-P-2020G |
| 4 | Remove cover on center console | | AR68.20-P-2350G |
| 5 | Remove ashtray with stowage compartment on front center console | | AR68.20-P-2410G |
| 6 | Remove glove compartment | | AR68.10-P-1400G |
| 7 | Remove stowage compartment or beverage holder | | AR68.10-P-1600G |
| 8 | Remove pushbutton control module for heater | | AR83.25-P-1120G |
| 9 | Unscrew screw (1-3, 6 each) | | |
| 10 | Remove center console (4) downward from top section of instrument panel (7) | | |
| 11 | Remove center console (4) | ↓ When installing insert insulating mat (6), expose electric wires and insert panel (5) into side insert tabs on center console | |
| 12 | Reinstall in opposite order | | |

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2350G Remove/Install Cover on Center Console](#) ←

AR68.20-P-2350G Remove/Install Cover on Center Console

[Notes](#)

Removing And Installing Cover On Center Console

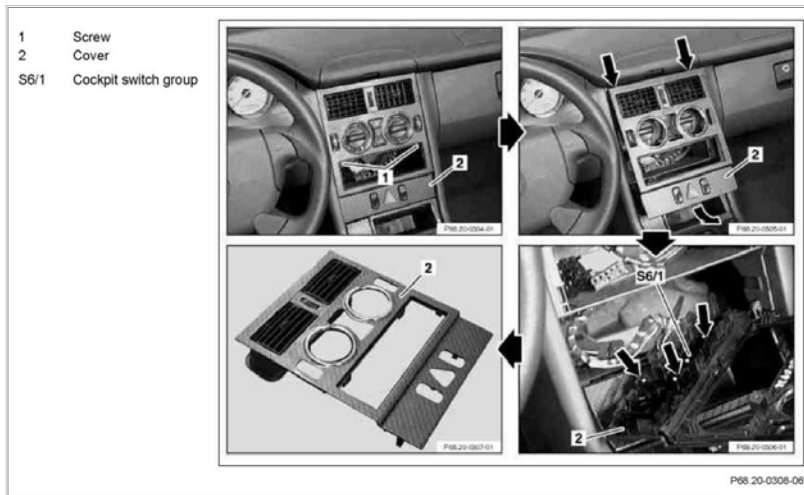

| Removal, installation | | |
|-----------------------|--|------------------|
| 1 | Remove radio | AR82.60-P-7502EA |
| 2 | Unscrew screws (1, 2 each) in radio cutout | |
| 3 | Pull cover (2) toward rear and pull out at top on instrument panel (arrow) (2 hooks) | |
| 4 | Unclip cockpit switch group (S6/1) at catch lugs (4 each) | |
| 5 | Remove cockpit switch group (S6/1) from cover (2) | |
| 6 | Lay down cover (2) | |
| 7 | Reinstall in opposite order | |

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2150G Disassemble/Reassemble Center Console](#) ←

AR68.20-P-2150G Disassemble/Reassemble Center Console

[Notes](#)

Disassembling And Reassembling Center Console

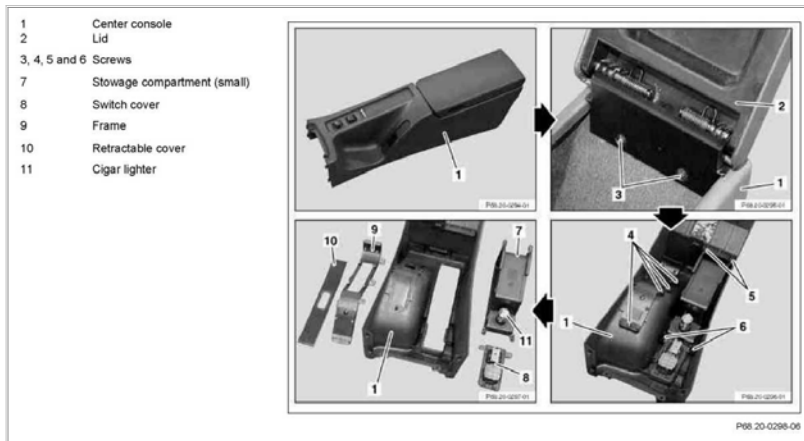

| | | Disassembly and assembly | |
|----|--|---|-----------------|
| 1 | | Center console removed | AR68.20-P-2010G |
| 2 | | Lay center console (1) down on suitable surface | |
| 3 | | Open lid (2) | |
| 4 | | Unscrew screws (3) | |
| 5 | | Remove lid (2) from center console (1) | |
| 6 | | Unscrew screws (4, 4 each) | |
| 7 | | Remove frame (9) and retractable cover (10) from center console (1) | |
| 8 | | Unscrew screws (5 and 6, 4 each) | |
| 9 | | Remove small stowage compartment (7) | |
| 10 | | Lift switch cover (8) at rear, pull back and remove | |
| 11 | | Press cigar lighter (11) out of stowage compartment (7) | |
| 12 | | Reassemble in opposite order | |

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2310G Remove/Install Cover on Gearshift Lever](#) ←

AR68.20-P-2310G Remove/Install Cover on Gearshift Lever

[Notes](#)

Removing And Installing Cover On Gearshift Lever

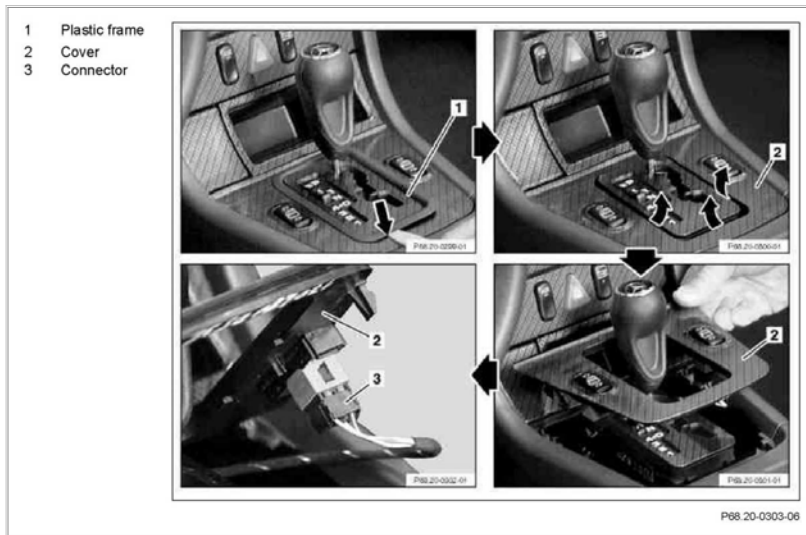

| | Removal, installation | | |
|---|---|-------------------------------------|---------------|
| 1 | Remove plastic frame (1) upward with long wedge | <input checked="" type="checkbox"/> | *115589035900 |
| 2 | Press cover (2) out of catch in center console at rear and side with long wedge | <input checked="" type="checkbox"/> | *115589035900 |
| 3 | Disconnect electrical connectors (3) on power window switches | | |
| 4 | Lay down cover (2) | | |
| 5 | Reinstall in opposite order | | |

Select Vehicle | New TSBs | Technician's Reference

Component Search:

Conversion Calculator


1998 Mercedes Benz SLK 230 (170.447) L4-2.3L SC (111.973)

[Vehicle Level](#) → [Body and Frame](#) → [Interior Moulding / Trim](#) → [Console](#) → [Service and Repair](#) → [AR68.20-P-2410G Remove/Install Ashtray Housing With Stowage Compartment In Front Center Console](#) ←

AR68.20-P-2410G Remove/Install Ashtray Housing With Stowage Compartment In Front Center Console

[Notes](#)

Remove/Install Ashtray Housing With Stowage Compartment In Front Center Console

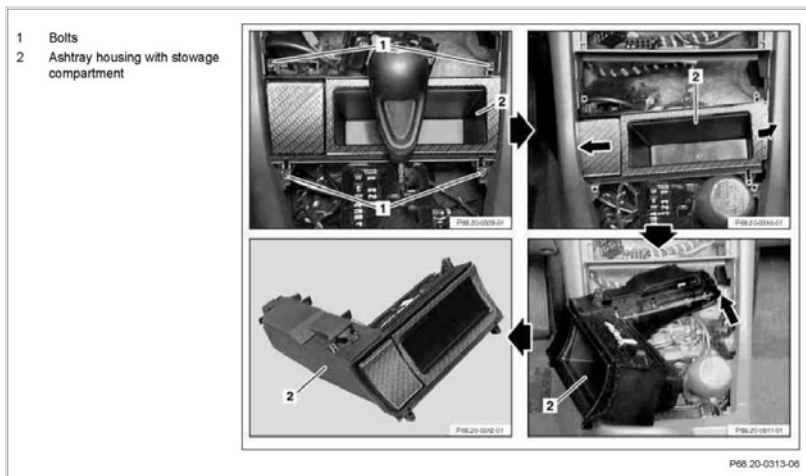

| | Remove/Install | | |
|---|---|----------|-----------------|
| 1 | Remove cover on shift lever | | AR68.20-P-2310G |
| 2 | Remove cover on center console | | AR68.20-P-2350G |
| 3 | Unscrew bolts (1) | 4 bolts. | |
| 4 | Press ashtray housing with stowage compartment (2) to left and remove on right (arrows) | | |
| 5 | Disconnect electrical line connector (arrow) | | |
| 6 | Install in the reverse order | | |