


**Mirror****Special Service Tool(s)**


 <p>ST1462-A</p>	<p>Rear View Mirror Remover T91T-17700A</p>
---	---

**Outside Rear View, Manual****Removal**


1. Remove the front door trim panel; refer to [Section 501-05](#).
2. Remove the rear view mirror mounting hole cover (17K709).




3. Remove the outside rear view mirror.
  1. Remove the three outside rear view mirror nuts.
  2. Remove the outside rear view mirror.

**Installation**


1. To install, reverse the removal procedure.

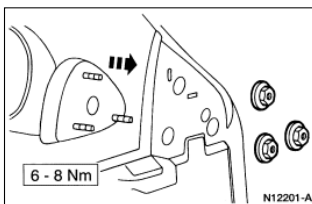**Outside Rear View, Power****Removal**


1. Disconnect the battery ground cable (14301).

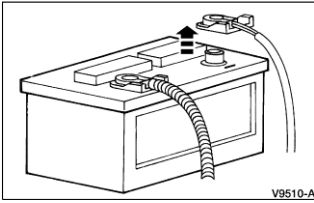

2. Remove the front door trim panel; refer to [Section 501-05](#) .
3. Remove the outside rear view mirror trim cover.

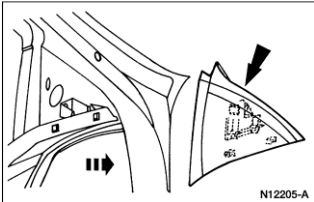


4. Remove the outside rear view mirror.
  1. Disconnect the power mirror electrical connector.
  2. Disconnect the power mirror wiring clips.
  3. Remove the three outside rear view mirror nuts.
  4. Remove the outside rear view mirror.
    - Feed the power mirror wiring through the opening in the front door (20124).

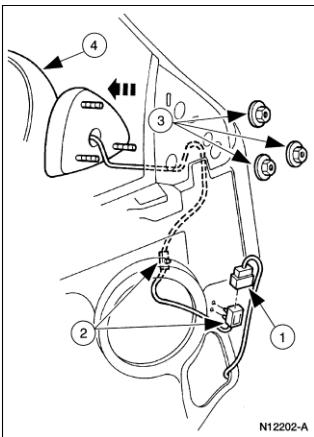

#### Installation

1. **NOTE:** When the battery is disconnected and reconnected, some abnormal drive symptoms may occur while the vehicle relearns its adaptive strategy. The vehicle may need to be driven 16 km (10 mi) or more to relearn the strategy.


To install, reverse the removal procedure.

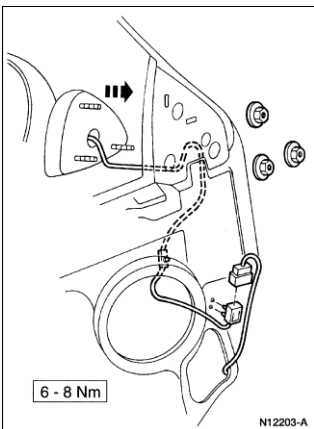


## Inside Rear View

### Removal


1. Insert (A) Rear View Mirror Remover into the mount on the (B) inside rear view mirror (17700).

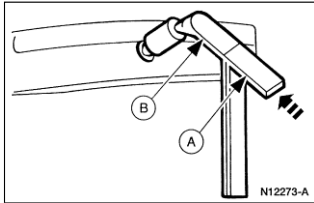

2. Use Rear View Mirror Remover to release the mirror retaining clip while pulling the inside rear view mirror away from the mirror mount.

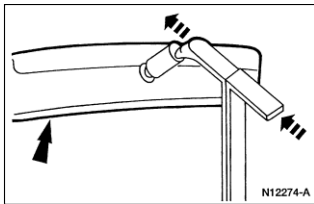

3. Remove the inside rear view mirror.

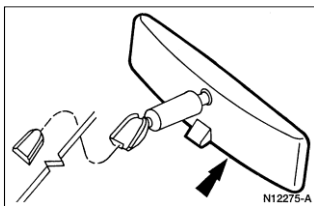

4. Use a wax pencil to mark the location of the inside rear view mirror bracket (17698) on the outside surface of the windshield glass (03100).

**NOTE:** Applying low heat to the windshield glass will make removal of excess adhesive easier.

5. Remove the remaining adhesive from the windshield glass.

### Installation

1. Clean the inside of the windshield glass with isopropyl alcohol to remove any remaining adhesive.
2. Use fine grit sandpaper on the inside rear view mirror bracket to lightly scuff the bonding surface.
  - Wipe surface clean with a paper towel soaked in isopropyl alcohol.

**NOTE:** Do not contaminate the clean bonding surface of the inside rear view mirror bracket.

3. Apply Rear View Mirror Adhesive D9AZ-19554-CA or equivalent meeting Ford specification ESB-M2G176-A to the bonding surface of the inside rear view mirror bracket and the windshield glass.
  - Allow the accelerator material to dry for three minutes.

**NOTE:** Do not touch the mounting surfaces before installation.

4. Press the inside rear view mirror bracket firmly against the windshield glass for approximately one minute.
5. Allow the adhesive to set for five minutes.
  - Remove any excess adhesive from the windshield glass with a clean, alcohol-dampened cloth.
6. Slide the inside rear view mirror downward onto the inside rear view mirror bracket.

