


ALLDATA REPAIR**2005 Jaguar S-Type (X200) V6-3.0L
Fuel Filler Neck Service and Repair, Procedures****Fuel Tank Filler Pipe****Removal****1. WARNING:**


- PLACE THE VEHICLE IN A QUARANTINED AREA AND ARRANGE NO SMOKING/PETROL FUME SIGNS ABOUT THE VEHICLE.
- BEFORE ANY WORK IS CARRIED OUT ON THE FUEL SYSTEM, GROUND THE VEHICLE TO EARTH AND MAINTAIN THE GROUND CONNECTION UNTIL THE WORK IS COMPLETE.
- DO NOT SMOKE OR CARRY LIGHTED TOBACCO OR OPEN FLAME OF ANY TYPE WHEN WORKING ON OR NEAR ANY FUEL RELATED COMPONENTS. HIGHLY FLAMMABLE VAPORS ARE ALWAYS PRESENT AND MAY IGNITE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.
- THE FUEL SYSTEM REMAINS PRESSURIZED FOR A LONG TIME AFTER THE IGNITION IS SWITCHED OFF. THE FUEL PRESSURE MUST BE RELIEVED BEFORE ATTEMPTING ANY REPAIRS. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.
- AFTER CARRYING OUT REPAIRS, THE FUEL SYSTEM MUST BE CHECKED VISUALLY FOR LEAKS. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.
- THIS PROCEDURE INVOLVES FUEL HANDLING. BE PREPARED FOR FUEL SPILLAGE AT ALL TIMES AND ALWAYS OBSERVE FUEL HANDLING PRECAUTIONS. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.
- IF TAKEN INTERNALLY DO NOT INDUCE VOMITING, SEEK IMMEDIATE MEDICAL ATTENTION. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.
- IF FUEL CONTACTS THE EYES, FLUSH THE EYES WITH COLD WATER OR EYEWASH SOLUTION AND SEEK MEDICAL ATTENTION.
- WASH HANDS THOROUGHLY AFTER HANDLING, AS PROLONGED CONTACT MAY CAUSE IRRITATION. SHOULD IRRITATION DEVELOP, SEEK MEDICAL ATTENTION.

De-pressurize the fuel system.


2. Remove the fuel tank filler pipe cap.

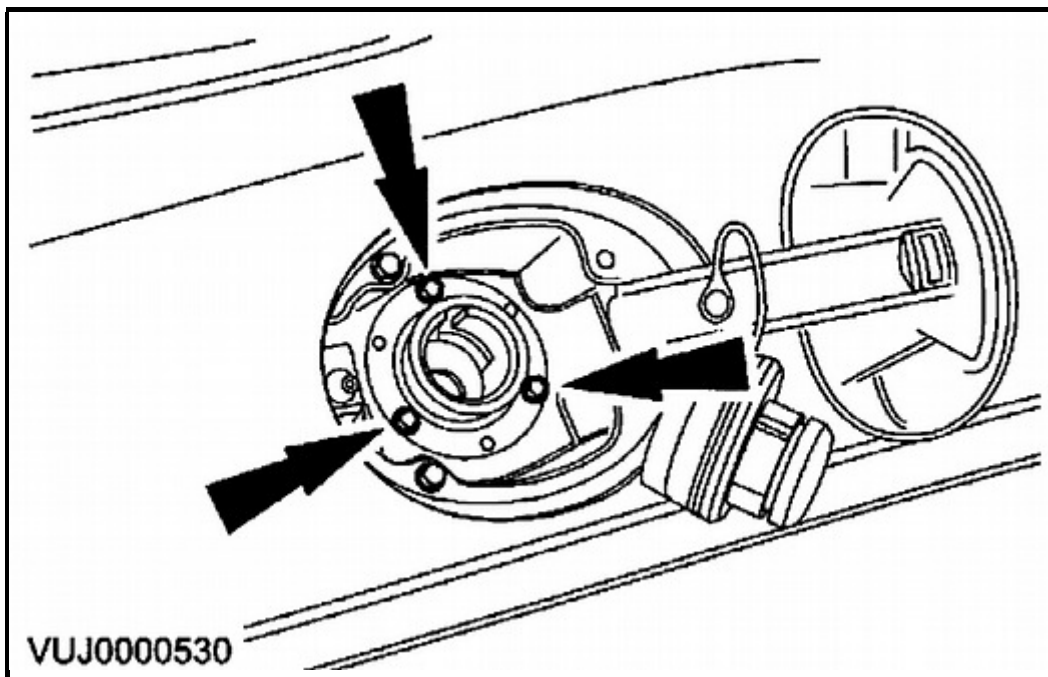


3. Remove the fuel tank filler pipe upper retaining bolts.
4. Remove the right-hand rear wheel and tire.

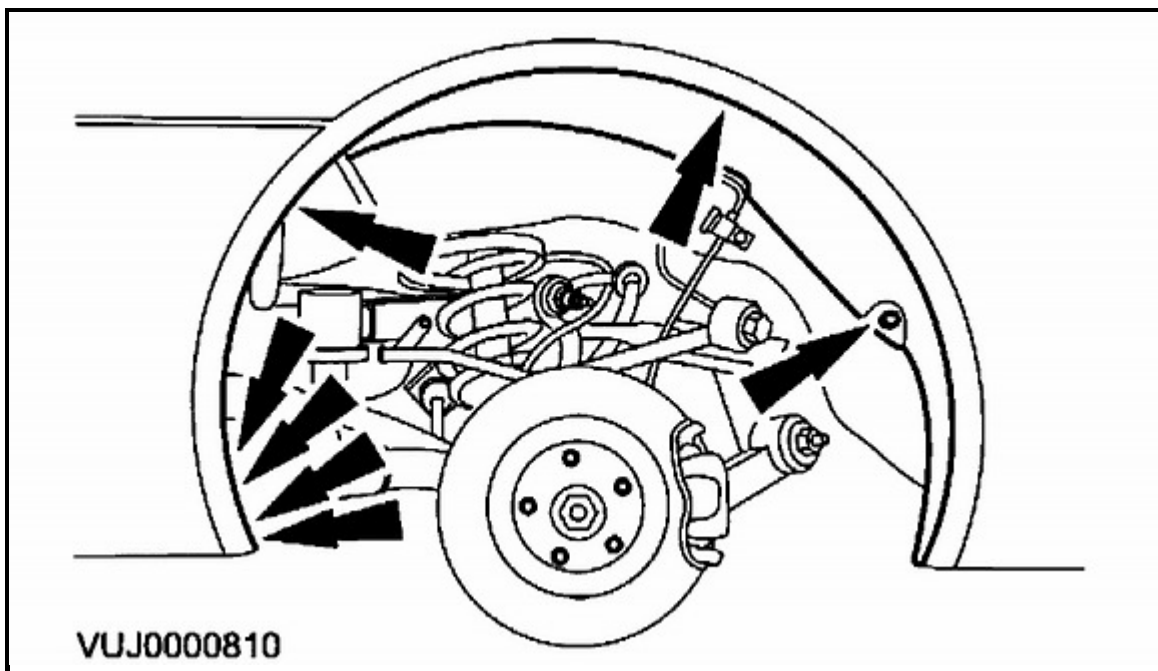

5. Remove the right-hand rear fender splash shield.

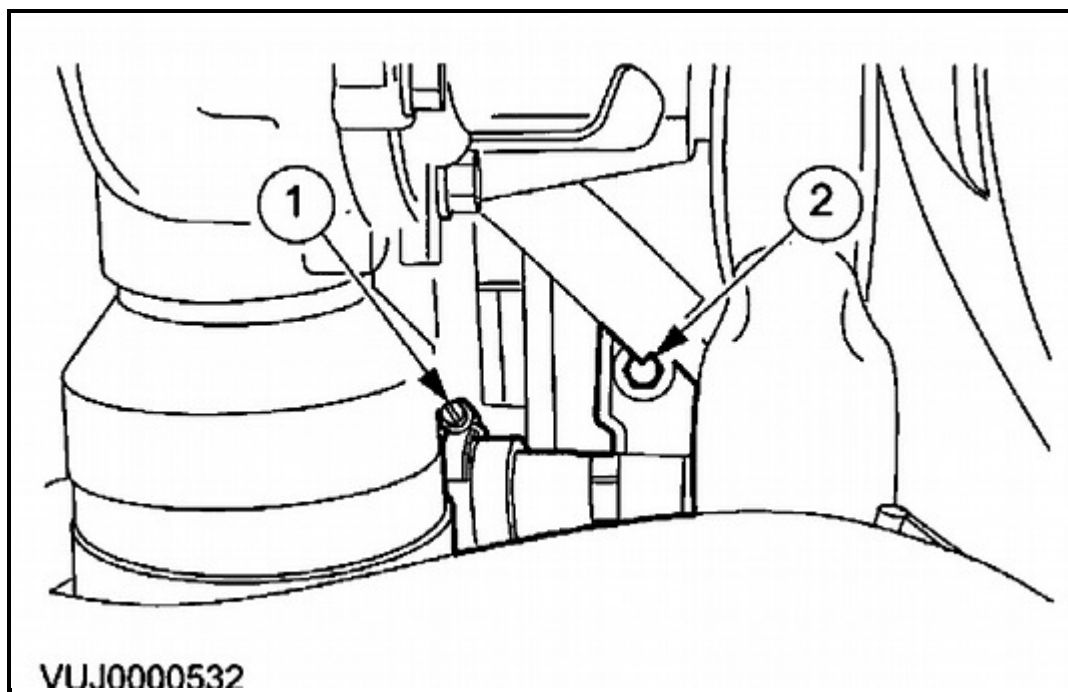

6. Detach the fuel tank filler pipe.
 1. Disconnect the fuel hose.
 2. Detach the fuel tank filler pipe.

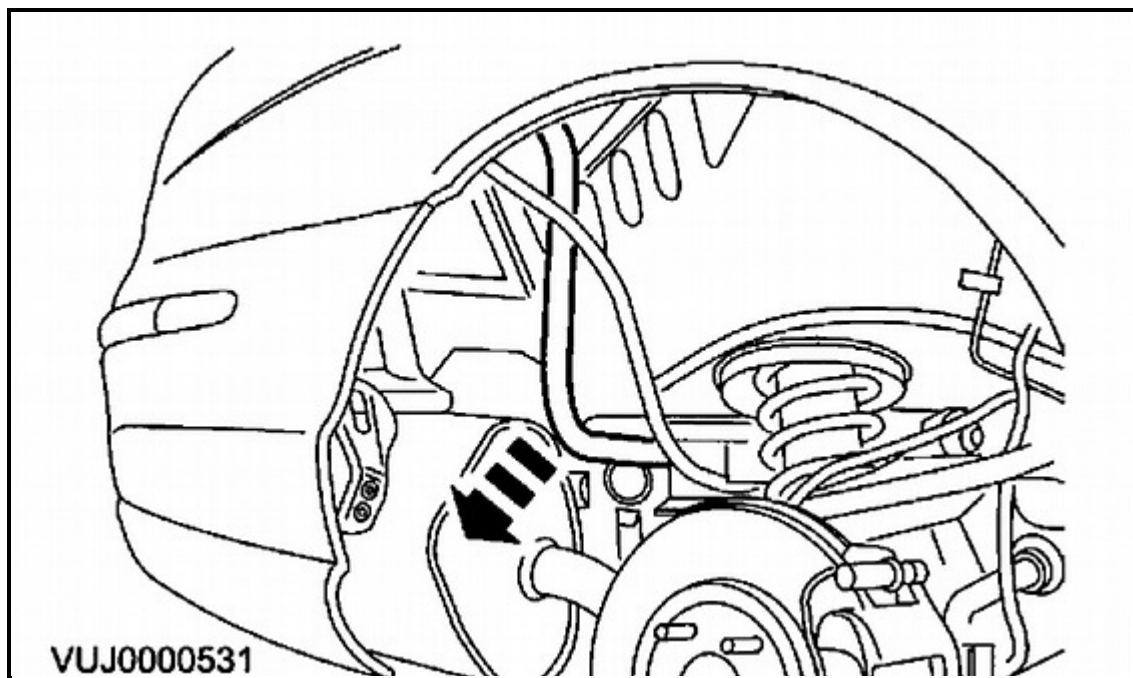

7. Remove the fuel tank filler pipe.

Installation

1. To install, reverse the removal procedure.

© 2012 ALldata, LLC. All Rights Reserved. (Version 2.0.12172)