

Slack Adjuster Removal and Installation

Removal

1. With the vehicle parked on a level surface, set the parking brakes, and shut down the engine. Chock the tires.

 **WARNING**

Manually cage each parking brake chamber power spring in the release (no application) position before continuing. Loss of brake chamber air pressure will cause sudden application of the parking brakes, which could result in personal injury.

2. If the rear slack adjusters will be removed, release the parking brakes, then cage the power spring of the parking brake chamber.
3. Remove the retainer clips from the large and small clevis pins. Remove the clevis pins. See [Fig. 1](#).

 **CAUTION**

Disengage the pull-pawl before turning the manual adjusting nut. Failure to do so could damage the pull-pawl teeth. The brake clearance will not automatically adjust if the pull-pawl is damaged.

4. Using a screwdriver or an equivalent tool, pry the pawl button out about 1/32 inch (0.8 mm). See [Fig. 2](#).
Wedge the tool in place. Pull-pawls are spring-loaded; when the tool is removed, the pull-pawl will engage the teeth automatically.
5. Using a wrench, manually turn the square adjusting nut clockwise to move the slack adjuster away from the clevis. See [Fig. 3](#).
6. Remove the snap ring, washer(s), and seal (if equipped) that secure the slack adjuster in place on the brake camshaft; save them for later installation.
7. Remove the slack adjuster from the camshaft.
8. Note the location and number of any remaining spacing washers on the camshaft. Remove the spacers and seal (LX500 and MX500 series only), and save them for later installation.

Installation

NOTE: For brake chambers that have pushrods with threaded clevises, measure the pushrod length before installing the new slack adjuster. With the brakes fully released, and no air pressure to the chamber, check the dimension between the chamber face and the centerline of the 1/2 inch clevis pin hole. It should be 2.25 inches (57 mm) for long stroke chambers, and 2.75 inches (70 mm) for standard stroke chambers.

1. Inspect the parts and prepare the slack adjuster for installation.
2. Check the brake camshaft splines for wear or corrosion.

IMPORTANT: The following lubricants provide corrosion protection. Do not mix them with other types of lubricants.

3. Coat the camshaft splines and the splines of the slack adjuster gear with Meritor 0-637, Meritor 0-695 (LX500 and MX500 only), Southwest SA 8249496, or an equivalent.
4. Apply the service brake several times. Make sure the return spring retracts the pushrod quickly and completely. Replace the return spring or brake chamber, if needed.
5. Slide the spacing washer(s) on the camshaft.
On LX500 and MX500, install the slack adjuster seal with the lip facing the brake spider.
6. If reinstalling the same slack adjuster:
 - 6.1 Slide the slack adjuster on the camshaft, with the actuator rod on the side opposite the brake chamber.
 - 6.2 On LX500 and MX500, install the orange slack adjuster seal on the camshaft. The lip on the seal must face the snap ring.
 - 6.3 Install the outer washer(s) and snap ring on the camshaft.

 **CAUTION**

Disengage the pull-pawl before turning the manual adjusting nut. Failure to do so could

Slack Adjuster Removal and Installation

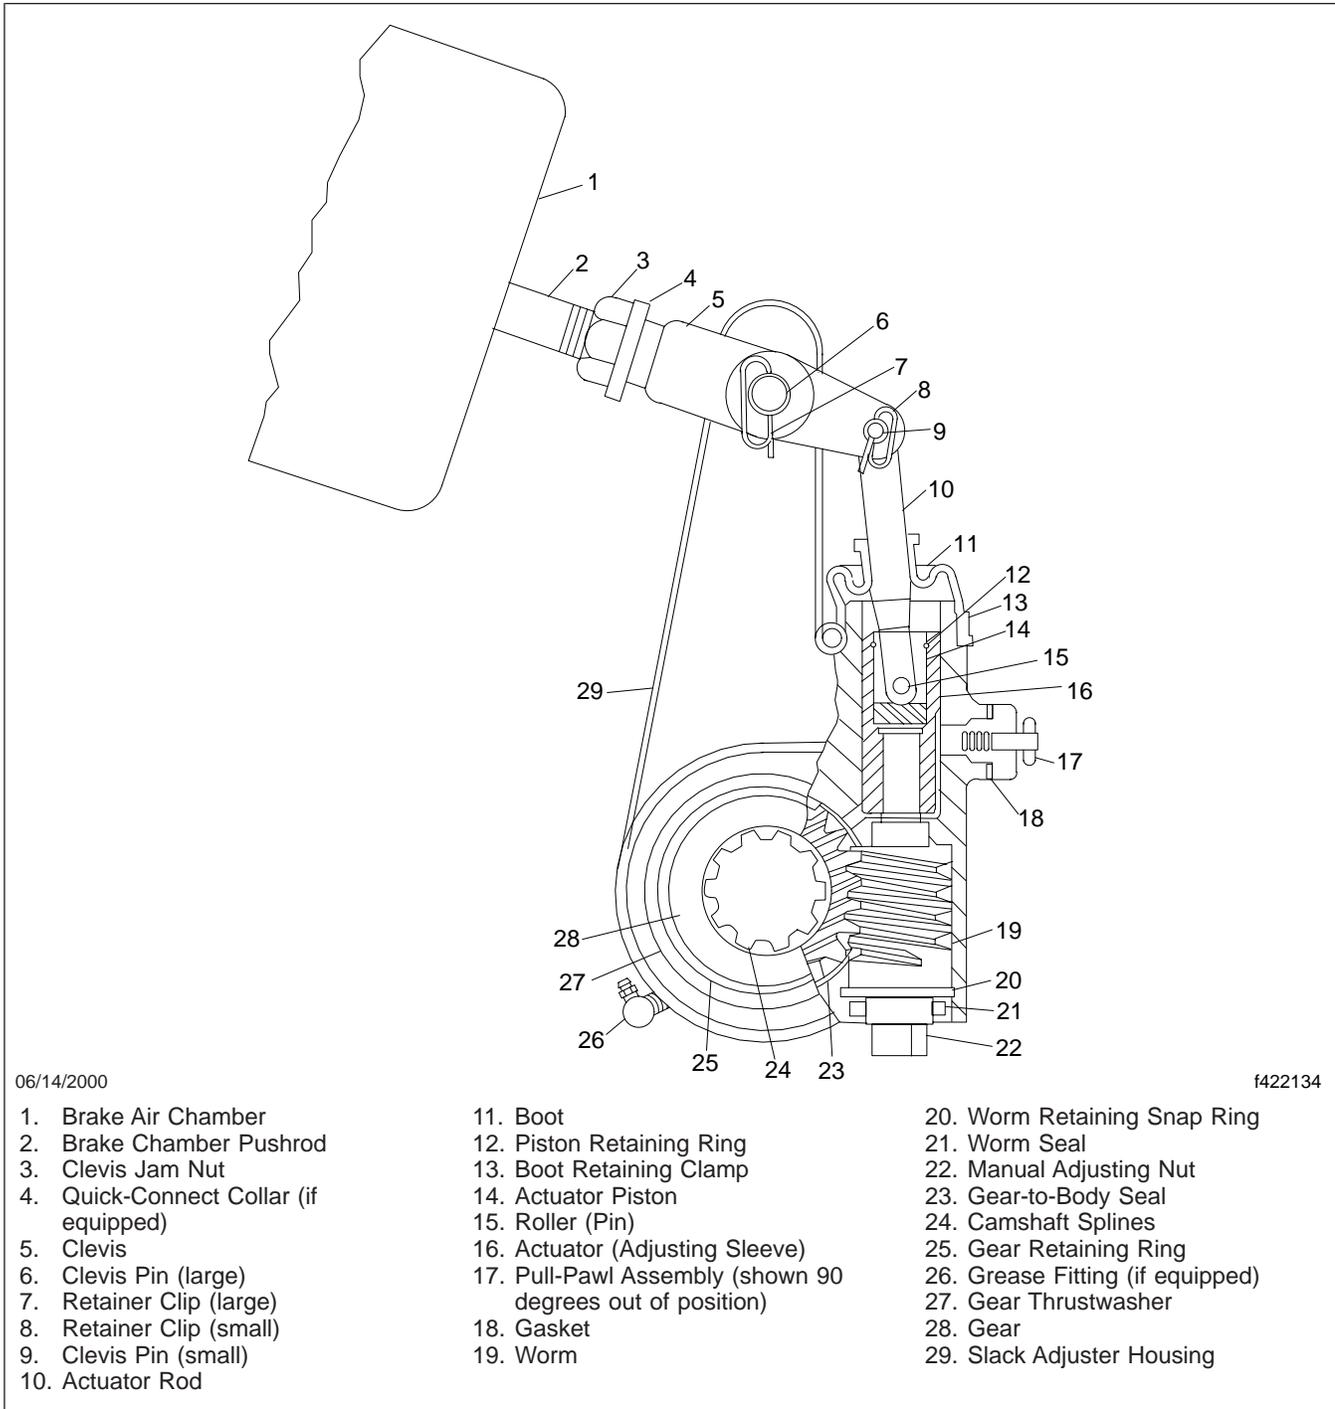


Fig. 1, Meritor Automatic Slack Adjuster

Slack Adjuster Removal and Installation

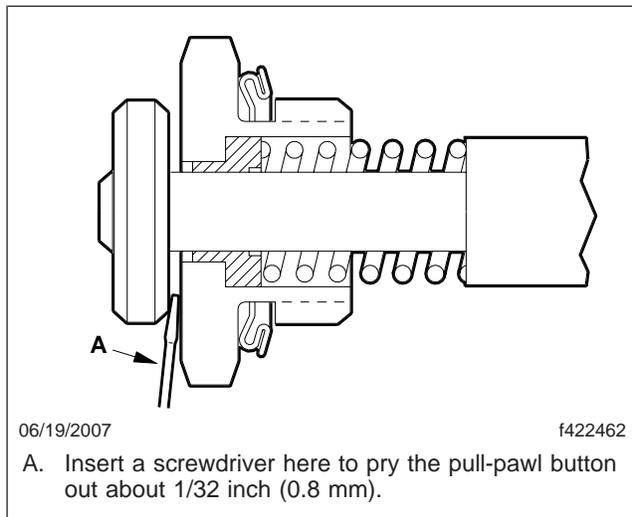


Fig. 2, Pull-Pawl Assembly

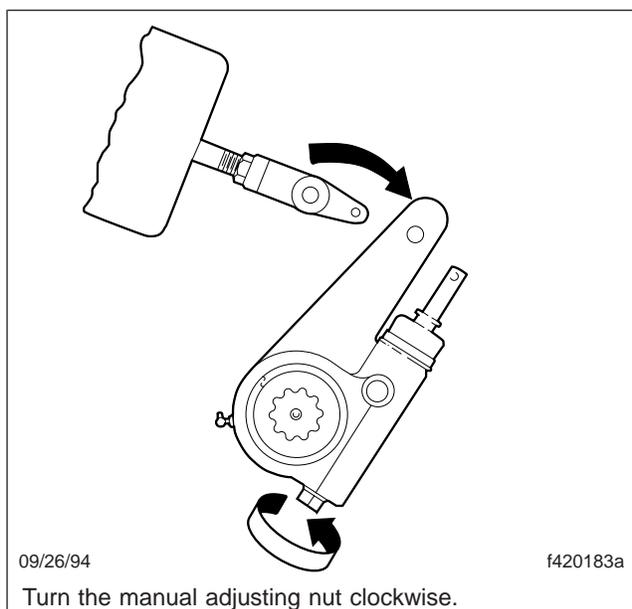


Fig. 3, Slack Adjuster Removal

damage the pull-pawl teeth. The brake clearance will not automatically adjust if the pull-pawl is damaged.

- 6.4 Using a screwdriver or an equivalent tool, pry the pawl button out at least 1/32 inch (0.8 mm). See Fig. 2. Wedge the tool in place.

IMPORTANT: Never pull the pushrod out to meet the slack adjuster or push the slack adjuster into position. Always turn the adjusting nut for positioning.

- 6.5 Using a wrench, turn the manual adjusting nut counterclockwise to align the hole in the slack adjuster housing with the large hole in the clevis. See Fig. 4.

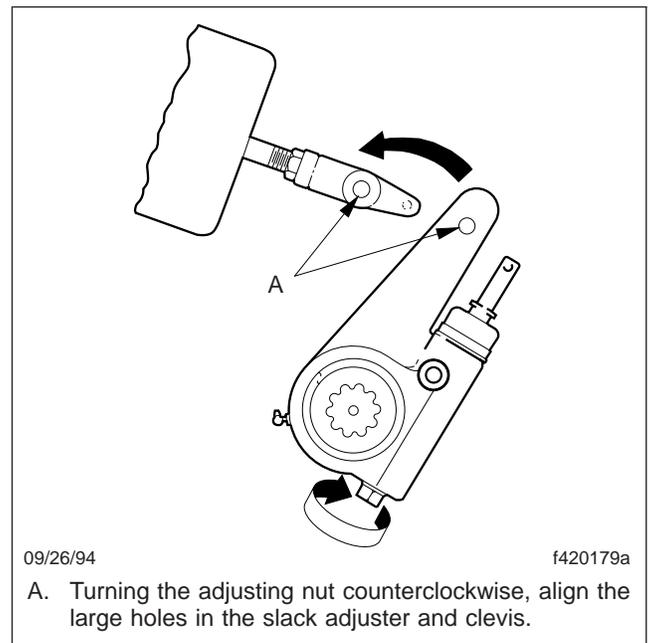


Fig. 4, Slack Adjuster Installation

7. If installing a new slack adjuster:
- 7.1 Using an installation template, measure the old and new slack adjusters. Measure from the center of the large clevis-pin hole to the center of the camshaft opening. See Fig. 5. Make sure the old and new slack adjusters are the same length.
 - 7.2 Slide the slack adjuster on the camshaft, with the actuator rod on the side opposite the brake chamber.
 - 7.3 On LX500 and MX500 series, install the orange slack adjuster seal on the camshaft. The lip on the seal must face the snap ring.

Slack Adjuster Removal and Installation

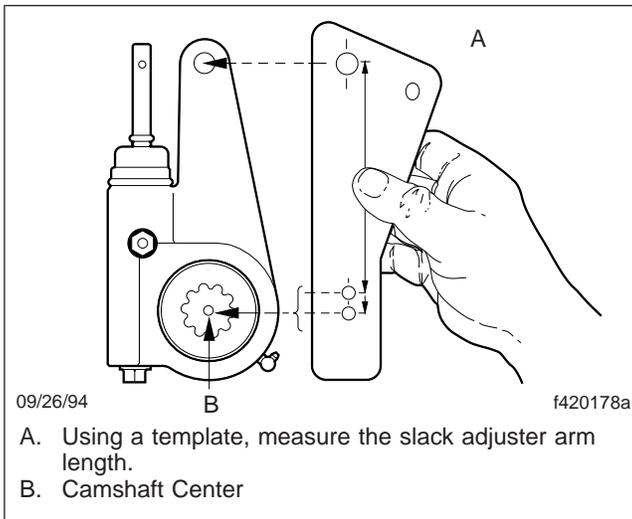


Fig. 5, Slack Adjuster Measurement

- 7.4 Install the outer washer(s) and snap ring on the camshaft.
- 7.5 Using a dial indicator, measure the in-and-out (axial) end play of the camshaft. If necessary, add the appropriate number of spacing washers to achieve the correct axial end play.
 - For all Cam-Master brakes, except LX500 and MX500 series, there should be no more than 0.060 inch (1.52 mm) movement.
 - For LX500 and MX500, the axial end play should be no more than 0.020 inch (0.51 mm).

CAUTION

Disengage the pull-pawl before turning the manual adjusting nut. Failure to do so could damage the pull-pawl teeth. The brake clearance will not automatically adjust if the pull-pawl is damaged.

- 7.6 Using a screwdriver or an equivalent tool, pry the pawl button out about 1/32 inch (0.8 mm). See Fig. 2. Wedge the tool in place.

IMPORTANT: Never pull the pushrod out to meet the slack adjuster or push the slack

adjuster into position. Always turn the adjusting nut for positioning.

- 7.7 Using a wrench, turn the manual adjusting nut counterclockwise to align the hole in the slack adjuster housing with the large hole in the clevis. See Fig. 4.
- 7.8 With the brakes fully released, place the installation template over the clevis and camshaft end. See Fig. 6.

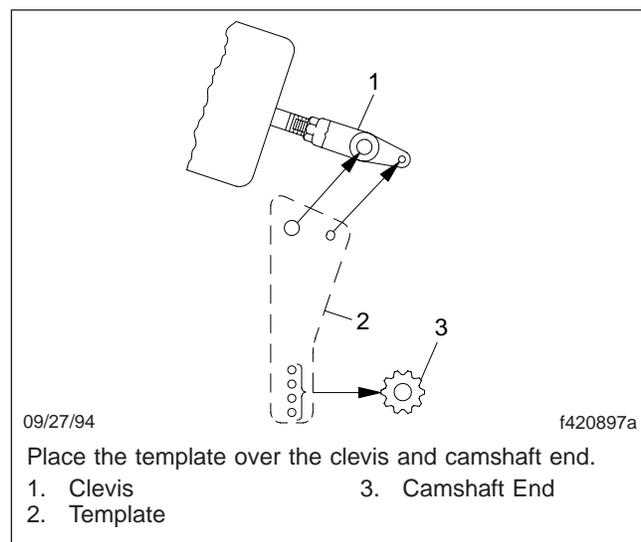


Fig. 6, Template Placement

- 7.9 Temporarily insert the large clevis pin through the large holes in the template and the clevis.
- 7.10 Select the hole in the lower part of the template that matches the length of the slack adjuster. Hold the template in place on the center of the camshaft with a pencil.
- 7.11 Make sure the small hole in the clevis is completely visible through the 1/8-inch hole at the top of the template.

If it is not, loosen the clevis jam nut, and turn the clevis adjusting nut to adjust the position of the clevis on the pushrod until the small clevis hole is completely visible.

Slack Adjuster Removal and Installation

IMPORTANT: The pushrod must be installed in the clevis at least 1/2 inch (13 mm) and not extend beyond it more than 1/8-inch (3-mm).

- 7.12 Make sure there is at least 1/2 inch (13 mm) of thread engagement between the clevis and the pushrod. Also, check that the pushrod does not extend through the clevis more than 1/8-inch (3-mm). See **Fig. 7**.

If necessary, cut the pushrod, install a new pushrod, or install a new brake chamber.

- 7.13 Temporarily insert the small clevis pin through the template, clevis, and actuator rod to make sure the alignment is correct. Repeat the adjustment, if necessary. When the alignment is correct, remove both clevis pins and the template.

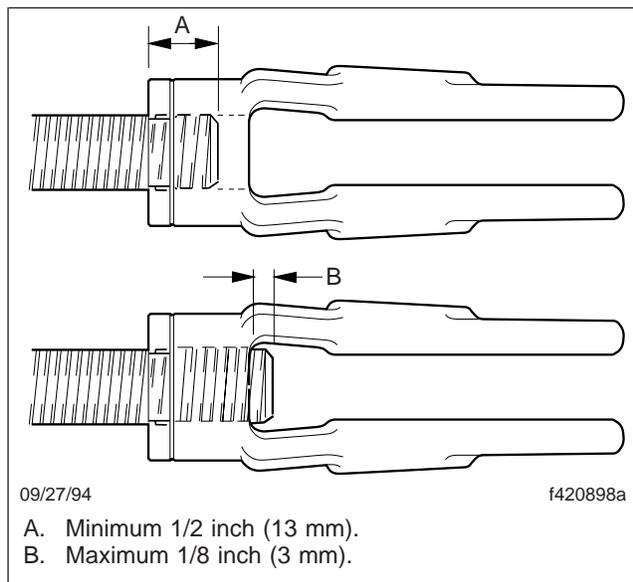


Fig. 7, Check Pushrod Engagement

8. Apply antiseize compound to the two clevis pins.
9. Insert both clevis pins with their pinheads on the inboard side of the slack adjuster. Be sure the small clevis pin is inserted through the hole in the actuator rod. Install new retaining clips to secure the clevis pins.

10. If it was loosened, tighten the clevis jam nut to the following values.
 - For 1/2–20 threads, tighten the clevis jam nut 20 to 30 lbf-ft (27 to 41 N·m).
 - For 5/8–18 threads, tighten the jam nut 25 to 50 lbf-ft (34 to 68 N·m).
11. Lube the slack adjuster through the grease fitting until the lubricant is forced out through the pawl slot or through the gear splines around the in-board snap ring.
12. Adjust the brakes. See "Brake Adjustment" below.

Brake Adjustment

NOTE: A properly working self-adjusting slack adjuster does not require manual adjustment while in service.

WARNING

Manually adjusting an automatic slack adjuster to bring the pushrod stroke within legal limits is likely masking a mechanical problem. Adjustment is not repairing. Before adjusting an automatic slack adjuster, troubleshoot the foundation brake system and inspect it for worn or damaged components. Improperly maintaining the vehicle braking system may lead to brake failure, resulting in property damage, personal injury, or death.

1. If a rear axle slack adjuster was installed, manually uncage the parking brake.
2. Fully release the brakes (the air chamber pushrod must be fully retracted).

CAUTION

Before turning the manual adjusting nut on the slack adjuster, disengage the pull-pawl. Failure to do so could damage the pull-pawl teeth. A damaged pull-pawl will not allow the slack adjuster to automatically adjust the brake clearance.

3. Using a screwdriver, pry the pull-pawl button out at least 1/32 inch (0.8 mm) to disengage the pull-pawl teeth from the slack adjuster actuator. See **Fig. 2**. Wedge the screwdriver in place. The pull-pawl will need to be disengaged until the brake adjustment is complete.

Slack Adjuster Removal and Installation

NOTE: When the screwdriver is removed, the pull-pawl will engage automatically.

4. Using the manual adjusting nut on the slack adjuster, adjust the brake chamber stroke (coarse adjustment), as follows. See **Fig. 8**.
 - 4.1 Turn the adjusting nut counterclockwise until the brake linings touch the brake drum.

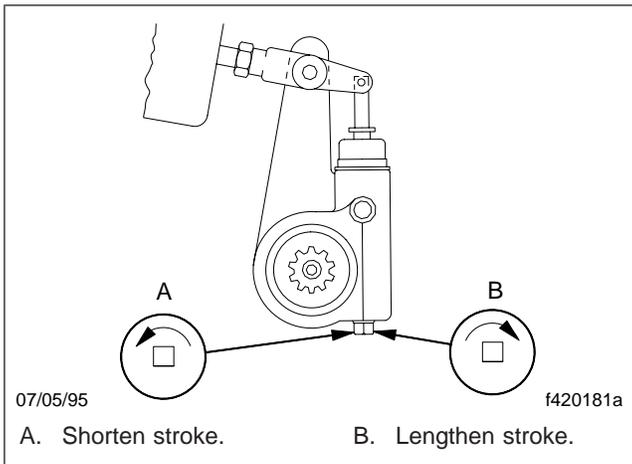


Fig. 8, Adjusting the Stroke

- 4.2 Then, turn the adjusting nut clockwise 1/2 turn.
5. Measure and adjust the free-stroke, as follows.
 - 5.1 With the brakes released, measure the distance from the bottom of the brake chamber to the center of the large clevis pin. Record this measurement as dimension A. See **Fig. 9**.
 - 5.2 Using a lever, move the slack adjuster until the brake linings contact the brake drum. Measure the distance from the bottom of the brake chamber to the center of the large clevis pin. Record this measurement as dimension B. See **Fig. 9**.
 - 5.3 Subtract dimension A from dimension B. The difference between these measurements is the free-stroke.
 - 5.4 The free-stroke for a new brake installation should be 5/8 to 3/4 inch (16 to 19 mm). For a brake that is in service, the

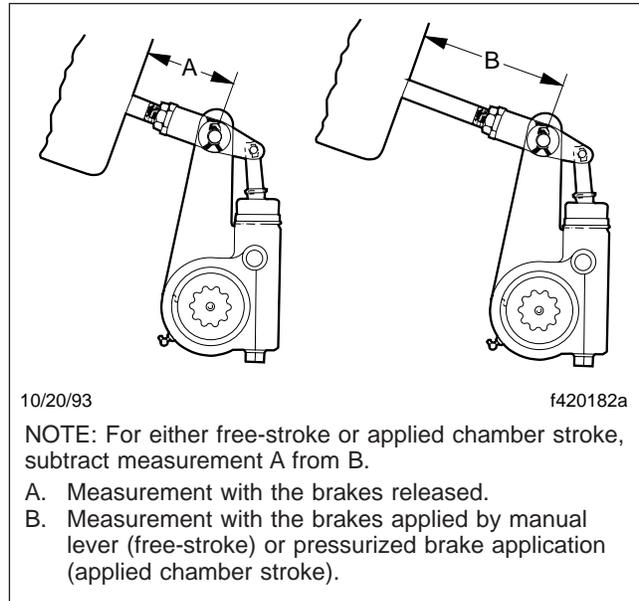


Fig. 9, Measuring the Stroke

free-stroke should be 1/2 to 5/8 inch (13 to 16 mm). If it is not, turn the adjusting nut 1/8 turn, as shown in **Fig. 8**. Then, measure the free-stroke again; readjust it until it is correct.

6. Measure and adjust the applied chamber stroke (fine adjustment), as follows.
 - 6.1 If system pressure is not already at 100 psi (689 kPa), start the engine and build air pressure, then shut down the engine.
 - 6.2 With the brakes released, measure the distance from the bottom of the brake chamber to the center of the large clevis pin. Record this measurement as dimension A. See **Fig. 9**.
 - 6.3 Fully apply the brakes. Then, measure the distance from the bottom of the brake chamber to the center of the large clevis pin. See **Fig. 9**, Ref. B. Record this measurement as dimension B.
 - 6.4 Subtract dimension A from dimension B. The difference between these measurements is the true applied chamber stroke.

Slack Adjuster Removal and Installation

CAUTION

The adjusted applied chamber stroke should be as short as possible but not so short that the free-stroke is too short and the linings drag. If the linings drag, the brakes could be damaged.

- 6.5 The applied chamber stroke must not exceed the maximum value specified in [Table 1](#).

If the applied chamber stroke is incorrect, turn the adjusting nut 1/8-turn counter-clockwise to shorten the stroke, or 1/8-turn clockwise to lengthen it. See [Fig. 8](#). Measure the applied stroke again and readjust it until it is correct.

- 6.6 If the slack adjuster is not maintaining the correct applied chamber stroke, check the condition of the foundation brakes. See [Section 42.01, Subject 150](#).

7. Remove the screwdriver from the pull-pawl assembly. This will engage the pull-pawl with the actuator.

WARNING

Do not operate the vehicle until the brakes have been adjusted and checked for proper operation. To do so could result in inadequate or no braking ability, which could cause personal injury or death, and property damage.

8. In a safe area, check for proper brake operation before you put the vehicle in service, as follows.
- 8.1 Apply and release the brakes several times to check for air leaks and proper operation of the slack adjusters.
- 8.2 Perform six low-speed stops to ensure proper parts replacement and full vehicle control.
- 8.3 Immediately after doing the above stops, check the drum temperatures. Any drums that are significantly cooler than others show a lack of braking effort on those wheels.

Brake Chamber Stroke Specifications			
Chamber Type (Size)	Maximum Applied Stroke*: inch (mm)	Free-Stroke: inch (mm)	
		New Brake Installation	In-Service Brake
Long Stroke†			
16 and 20	2-1/2 (64)	5/8-3/4 (16-19)	1/2-5/8 (13-16)
24 and 30	3 (76)		

* Specifications are relative to a brake application with 80-90 psi (550-620 kPa) air pressure in the brake chambers.

† Long stroke design is indicated by a tag, or embossing, on the brake chamber.

Table 1, Brake Chamber Stroke Specifications

