


Assignment of rear fuse and relay box

50 to 77 Fuses
 K40/5 Rear fuse and relay module
 Q to U Relays

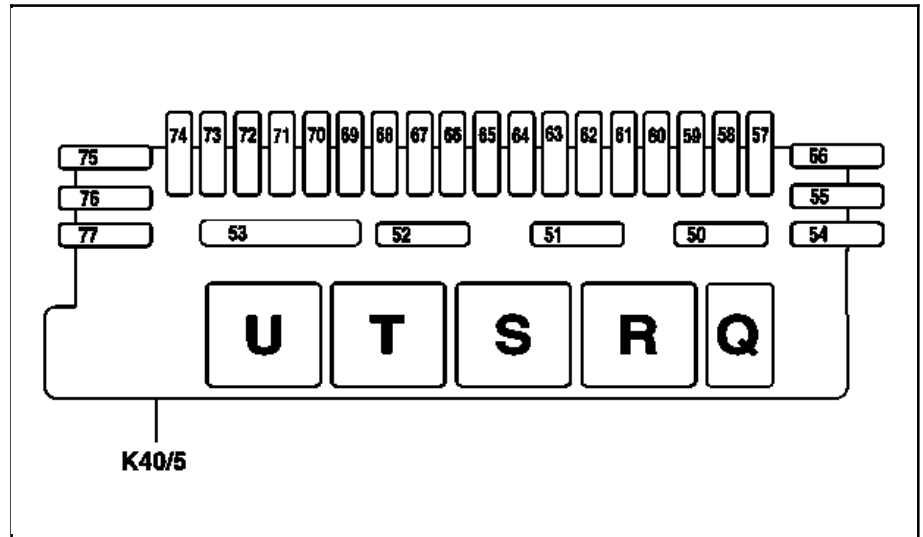

P54.15-2033-05

Fuse	Terminal	Color of fused wire	Fused function	Rating in amperes (A)
f50	30	-	Valid for code (540) Electric roller blind for rear window: <ul style="list-style-type: none"> Rear window roller blind relay (K40/5kQ) 	10
f51	30	-	Valid for code (882) Towing sensor: <ul style="list-style-type: none"> Towing sensor relay (K40/5kR) 	5
f52	30	-	<ul style="list-style-type: none"> Fuel pump relay (K40/5kT) 	30
f53	30	-	<ul style="list-style-type: none"> Heated rear window relay (K40/5kU) 	50
f54	15	rs/rt 0.75 mm ²	Valid for code (550) Trailer hitch: <ul style="list-style-type: none"> Trailer recognition control unit (N28/1) 	10
f55	30	rt/vi 2.5 mm ²	Valid for code (550) Trailer hitch: <ul style="list-style-type: none"> Trailer socket, 13-pin (X58) 	25
f56	30	rt/ge 2.5 mm ²	Valid for code (550) Trailer hitch: <ul style="list-style-type: none"> Trailer recognition control unit (N28/1) 	30
f57	30	rt 2.5 mm ²	Valid for code (881) Remote trunk closing (RTC): <ul style="list-style-type: none"> Trunk lid "open" relay (K69/1) trunk lid close relay (K69/2) RTC [HDFS] hydraulic pump (M51) 	25
f58	30	gr/sw 0.75 mm ²	Valid for code (889) Keyless Go, on model 215: <ul style="list-style-type: none"> Keyless Go control unit (N69/5) Left door Keyless Go antenna (A2/38) Left rear Keyless Go antenna (A2/39) Right door Keyless Go antenna (A2/40) Right rear Keyless Go antenna (A2/41) Left door Keyless Go lift solenoid (L12) Right door Keyless Go lift solenoid (L12/2) Valid for model 220: <ul style="list-style-type: none"> Keyless Go control unit (N69/5) Left front door Keyless Go antenna (A2/38) Left rear door Keyless Go antenna (A2/39) Right front door Keyless Go antenna (A2/40) Right rear door Keyless Go antenna (A2/41) Left front door Keyless Go lift solenoid (L12) Left rear door Keyless Go lift solenoid (L12/1) Right front door Keyless Go lift solenoid (L12/2) Right rear door Keyless Go lift solenoid (L12/3) 	7.5

f59	30	rt/ws 2.5 mm ²	Valid for code (450) Taxi version: <ul style="list-style-type: none"> ● Special vehicle multifunction control unit (SVMCU) (N26/9) 	30
f60	30	rt/ge 0.75 mm ²	Valid for code (860) TV tuner: <ul style="list-style-type: none"> ● Rear window antenna amplifier module (A2/12) Valid except code (498) Japan version: <ul style="list-style-type: none"> ● Navigation processor (N41/1) Valid for code (498) Japanese version: <ul style="list-style-type: none"> ● VICS power supply separation pointX137/1 	7.5
f61	30	sw/ge 0.75 mm ² rt/sw 0.75 mm ² sw/ge 1.5 mm ² rt/sw 1.5 mm ² sw/ge 1.0 mm ² rt/ge 0.75 mm ²	Valid for hands-free system: <ul style="list-style-type: none"> ● Hands-free system control unit (A35/1) Valid for code (813) Voice control system (VCS [SBS]), except code (498) Japan version: <ul style="list-style-type: none"> ● Voice control system control unit (A35/11) Valid for code (380) Preinstallation for MB phone "CTEL" (complete): <ul style="list-style-type: none"> ● Portable CTEL connector (X39/39) Valid for code (382) MB phone "CTEL" in armrest, except code (498) Japan version, except code (491) USA version: <ul style="list-style-type: none"> ● Telecommunications control unit (N112) ● Bluetooth module (A34/11) Valid for model 220: <ul style="list-style-type: none"> ● Rear telephone handset (A34/8) Valid for code (388) Universal Portable CTEL Interface system, except code (491) USA version, except code (498) Japan version: <ul style="list-style-type: none"> ● Universal Portable CTEL Interface (UPCI [UHI]) control unit (N123/1/) ● Telephone interface (A34/4) ● E-net compensator (A28/3) Valid for code (388) Universal Portable CTEL Interface system, with code (491) USA version: <ul style="list-style-type: none"> ● Universal Portable CTEL Interface (UPCI [UHI]) control unit (N123/1) ● Emergency call system control unit (N123/4) Valid for code (498) Japanese version: <ul style="list-style-type: none"> ● GPS box control unit (N41/6) Valid for code (860) TV tuner, except code (498) Japan version: <ul style="list-style-type: none"> ● TV tuner (MOST) (A2/10) ● Operating and display unit display in rear (A40/2) 	7.5
f62	30	sw/ge 0.75 mm ²	<ul style="list-style-type: none"> ● PSE control unit (combined) (A37) 	20
f63	30	rt 4.0 mm ²	Valid for code (433) Left dynamic seat, incl. multicontour seat, and for code (434) Right dynamic seat, incl. multicontour seat, on model 220: <ul style="list-style-type: none"> ● Pneumatic pump for dynamic seat control (M40/1) 	30
f64	30	rt/br 2.5 mm ²	<ul style="list-style-type: none"> ● Left front seat adjustment control unit with memory (N32/1) 	25
f65	15	-	-	-
f66	30	rt/vi 2.5 mm ²	<ul style="list-style-type: none"> ● Right front seat adjustment control unit with memory (N32/2) 	25
f67	30	rt/bl 2.5 mm ²	Valid for code (223) Electrically adjustable rear bench seat, and for code (224) Electrically adjustable individual rear seats with seat ventilation, heated seats and memory package, on model 220: <ul style="list-style-type: none"> ● Rear seats control unit (N25/6) 	25

f68	30	rt/ws 1.0 mm ²	Valid for code (582) Rear air conditioning, on model 220: <ul style="list-style-type: none"> ● Rear AC control unit (N22/4) ● Rear auxiliary heating system supply unit (A31/1) ● Rear AC refrigerant shutoff valve (Y67) 	15
f69	30	rt/sw 1.0 mm ²	Valid for code (582) Rear air conditioning, on model 220: <ul style="list-style-type: none"> ● Rear air conditioning electronic blower controller (N29/2) 	15
f70	30	rt/sw 0.75 mm ²	Valid for code (475) tire pressure monitor: <ul style="list-style-type: none"> ● TPM [RDK] control unit (N88) 	10
f71	30	rt 6.0 mm ²	Valid for model 220: <ul style="list-style-type: none"> ● Left front reversible emergency tensioning retractor (A76) 	40
f72	30	rt 2.5 mm ² rt/gn 4.0 mm ²	Valid for model 215: <ul style="list-style-type: none"> ● Rear control unit (N22/6) Valid for model 220: <ul style="list-style-type: none"> ● Left rear door control unit (N69/3) 	40
f73	30	rt 6.0 mm ²	Valid for model 220: <ul style="list-style-type: none"> ● Right front reversible emergency tensioning retractor (A76/1) 	40
f74	30	rt 4.0 mm ² rt/bl 4.0 mm ²	Valid for model 215: <ul style="list-style-type: none"> ● Rear control unit (N22/6) Valid for model 220: <ul style="list-style-type: none"> ● Right rear door control unit (N69/4) 	40
f75	15	sw/rt 1.5 mm ²	Valid for code (220) Parktronic system (PTS): <ul style="list-style-type: none"> ● PTS control unit (N62) 	10
f76	30	rt/bl 1.5 mm ²	Valid for code (308) Refrigerator box in center rear backrest, on model 220: <ul style="list-style-type: none"> ● Rear backrest refrigerator box (A39/1) 	15
f77	30	rt/sw 2.5 mm ²	<ul style="list-style-type: none"> ● Overhead control panel control unit (N70) 	40